

# SANICONDENS BEST

## CONNECTIONS



BOILER



AIR  
CONDITIONER



HVAC

## APPLICATIONS



RESIDENTIAL



COMMERCIAL



## PUMPING DISTANCE

15 Ft




150 Ft



Example of installation. Follow local plumbing codes for actual install.

The Sanicondens Best is a pump used to **neutralize and pump condensate from condensing boilers, HVAC systems, water heater systems, etc.** The Sanicondens Best will pump condensate waste up to **15 feet in height and/or 150 feet away** from a soil stack.

- Discharges the condensate waste through a 3/8" vinyl tube. A non-return valve is included on the discharge connection provided with the system.
- Comes with provisions for a **ready-to-wire connection to an external overflow switch** that will shut down the appliance or alert the consumer in the event of overflow. It also includes all necessary hardware for ease of installation; **20 Ft of vinyl tubing, inlet adapter, discharge adapter.**
- Discharges **condensate from a condensing boiler or other condensate producing fixtures.** The condensate will drain into the system via **four 1" inlets located on top of the enclosure.**
- Comes equipped with a **built-in neutralizer to raise pH levels** for harsh HVAC applications. Neutralizing granules come included with the condensate pump. Will neutralize condensate from appliances up to **240,000 BTU/hour input.**

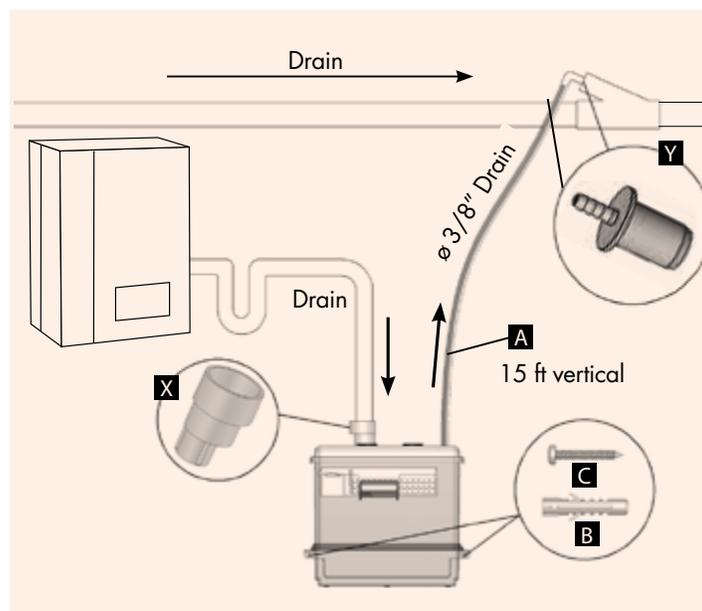


## 2 IN 1 CONDENSATE PUMP WITH BUILT-IN NEUTRALIZER FOR HARSH HVAC APPLICATIONS

Neutralizing agent (Part# 042) is used to **raise the pH level** from condensate being produced by condensing boilers, air conditioners, etc. The two quart capacity condensate pump comes equipped with **all the necessary hardware for easy installation.** It can be installed on top of flat surface or mounted on a wall.


SANICONDENS BEST • PART N° 041



**PLEASE CALL US TOLL-FREE AT  
800-571-8191 (US) / 800-363-5874 (CDN)  
TO PURCHASE PARTS REFERENCED BELOW**

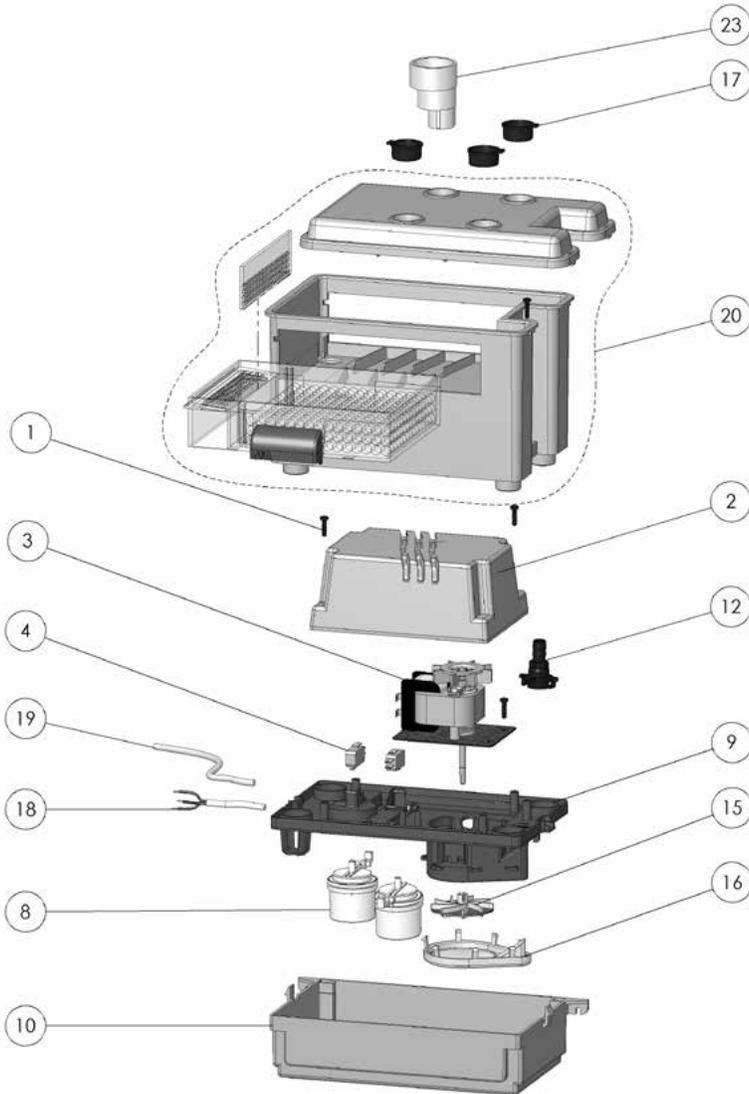

### DIMENSIONAL DRAWINGS

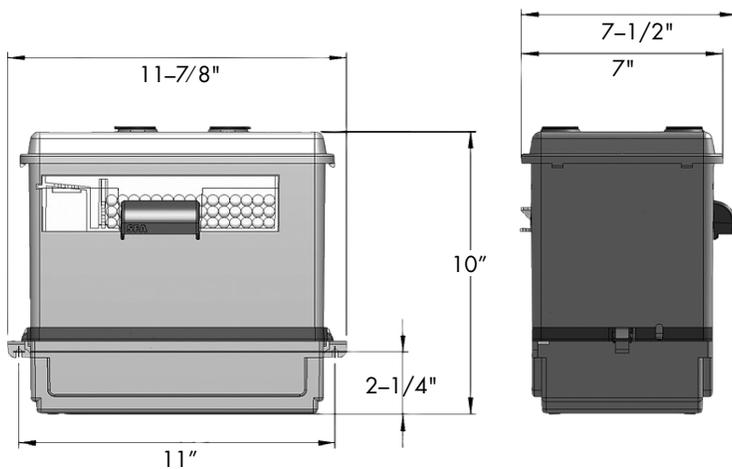

### TECHNICAL SPECIFICATIONS

**Pump type:**

Condensate pump

**Electrical:**

120 V – 60 Hz / 1.5 Amps (Max)

**Motor:**

1/30 HP oil-filled thermally protected motor

**Operating Temperature:**

160°F Max

**Power cord length:**

61-1/2 inches

**Noise level:**

≤ 44 dBA (Lp) (measured at 3 ft.)

**Discharge pipe diameter:**

3/8"

**Discharge rate at 15 ft:**

30 GPH

**Discharge rate at 3 ft:**

86 GPH

**Normal running time:**

3-5 sec (Short bursts)

**Capacity:**

0.5 gallons / 2.1 liters

**Inlets:**

1" (top)

**Method of activation:**

Float/Microswitch

**Weight:**

12 lbs / 5.4 kg

**Certifying agencies:**

CSA (IPC, NSPC)

**Recommended Accessories:**

Neutralizing granules (Part# 042)

**Connections:**

Condensing boiler, HVAC systems,  
air conditioners



**Pump away harsh condensate from any HVAC application!**